

Fotometrische Daten


3000 K

0.5	0.89 0.89	E(0°) E(C90) 41.8° E(C0) 41.6°	9222 1911 1934
1.0	1.79 1.78	E(0°) E(C90) 41.8° E(C0) 41.6°	2306 478 483
1.5	2.68 2.66	E(0°) E(C90) 41.8° E(C0) 41.6°	1025 212 215
2.0	3.58 3.55	E(0°) E(C90) 41.8° E(C0) 41.6°	576 119 121
2.5	4.47 4.44	E(0°) E(C90) 41.8° E(C0) 41.6°	369 76 77
3.0	5.36 5.33	E(0°) E(C90) 41.8° E(C0) 41.6°	256 53 54

Distance [m] Cone diameter [m]

Illuminance [lx]

— C0 - C180 (Half beam angle: 83.2°)
— C90 - C270 (Half beam angle: 83.6°)

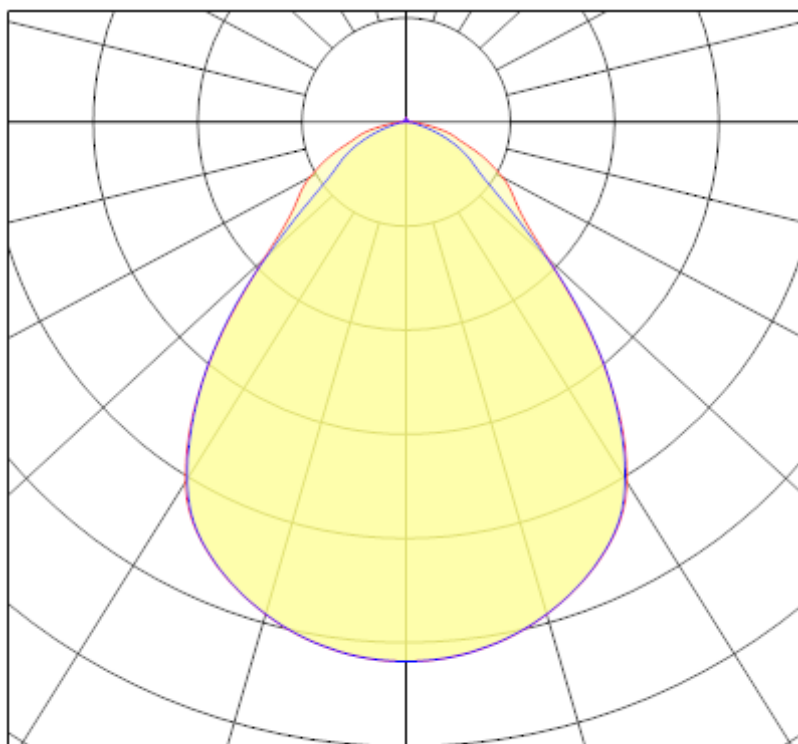

cd/klm

— C0 - C180 — C90 - C270

Fotometrische Daten


4000 K

0.5	0.89 0.88	E(0°) E(C90) 41.8° E(C0) 41.5°	9742 2023 2051
1.0	1.79 1.77	E(0°) E(C90) 41.8° E(C0) 41.5°	2436 506 515
1.5	2.68 2.65	E(0°) E(C90) 41.8° E(C0) 41.5°	1082 225 229
2.0	3.58 3.54	E(0°) E(C90) 41.8° E(C0) 41.5°	609 126 129
2.5	4.47 4.42	E(0°) E(C90) 41.8° E(C0) 41.5°	390 81 82
3.0	5.36 5.31	E(0°) E(C90) 41.8° E(C0) 41.5°	271 56 57

Distance [m] Cone diameter [m]

Illuminance [lx]

— C0 - C180 (Half beam angle: 83.0°)
— C90 - C270 (Half beam angle: 83.6°)

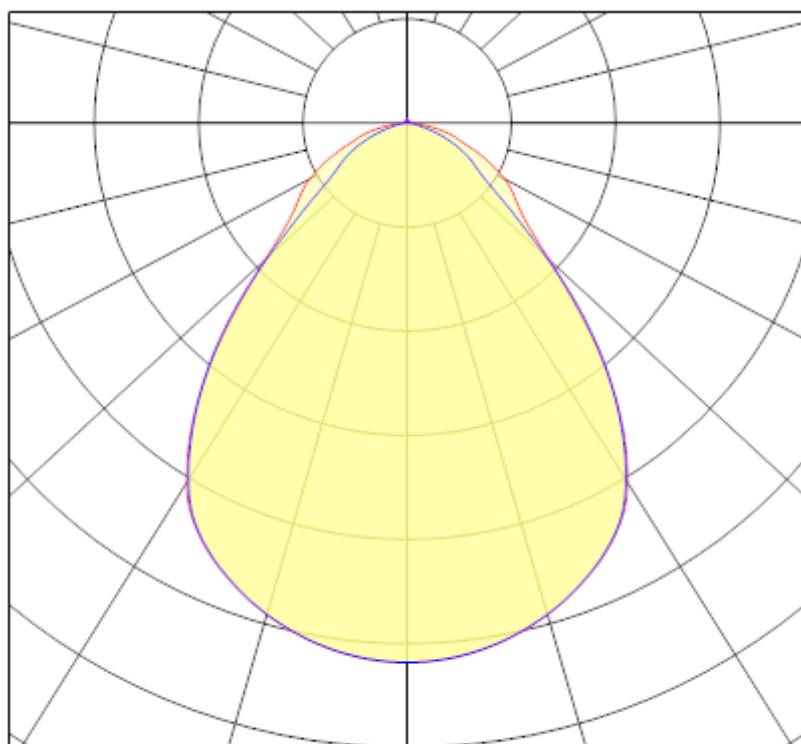

cd/klm

— C0 - C180 — C90 - C270